

# Fiber Optic wall mounting and 19" termination boxes



**“Etap fiber optic wall mounting and 19” termination boxes are designed for fiber optic termination: ST, SC, LC ”**




- Designed for fiber optic termination: ST, SC, LC connector plates are available in front.
- Lockable in front with spring type screws.
- Shipment configuration is 1 ea. PG 16 plug and 4ea. plastic cable organiser.
- Cable clamps on the inner surface for fixing cables.
- Standard colour is RAL 9005 black.  
RAL 7035 light grey colour is also available.

Unless noted shipped in black RAL 9005.

## Fiber optic termination boxes - Wall mounting type

Part number	Product definition
<b>M66 FBOX 6ST</b>	Wall mounting fiber optic termination box, capacity: 6 port ST, colour: black
<b>M66 FBOX 24ST</b>	Wall mounting fiber optic termination box, capacity: 24 port ST, colour: black
<b>M66 FBOX 24SC D</b>	Wall mounting fiber optic termination box, capacity: 24 port SC duplex, colour: black
<b>M66 FBOX 24SC S</b>	Wall mounting fiber optic termination box, capacity: 24 port SC simplex, colour: black

## FIBER OPTIC 19" RACK MOUNT TERMINATION BOXES

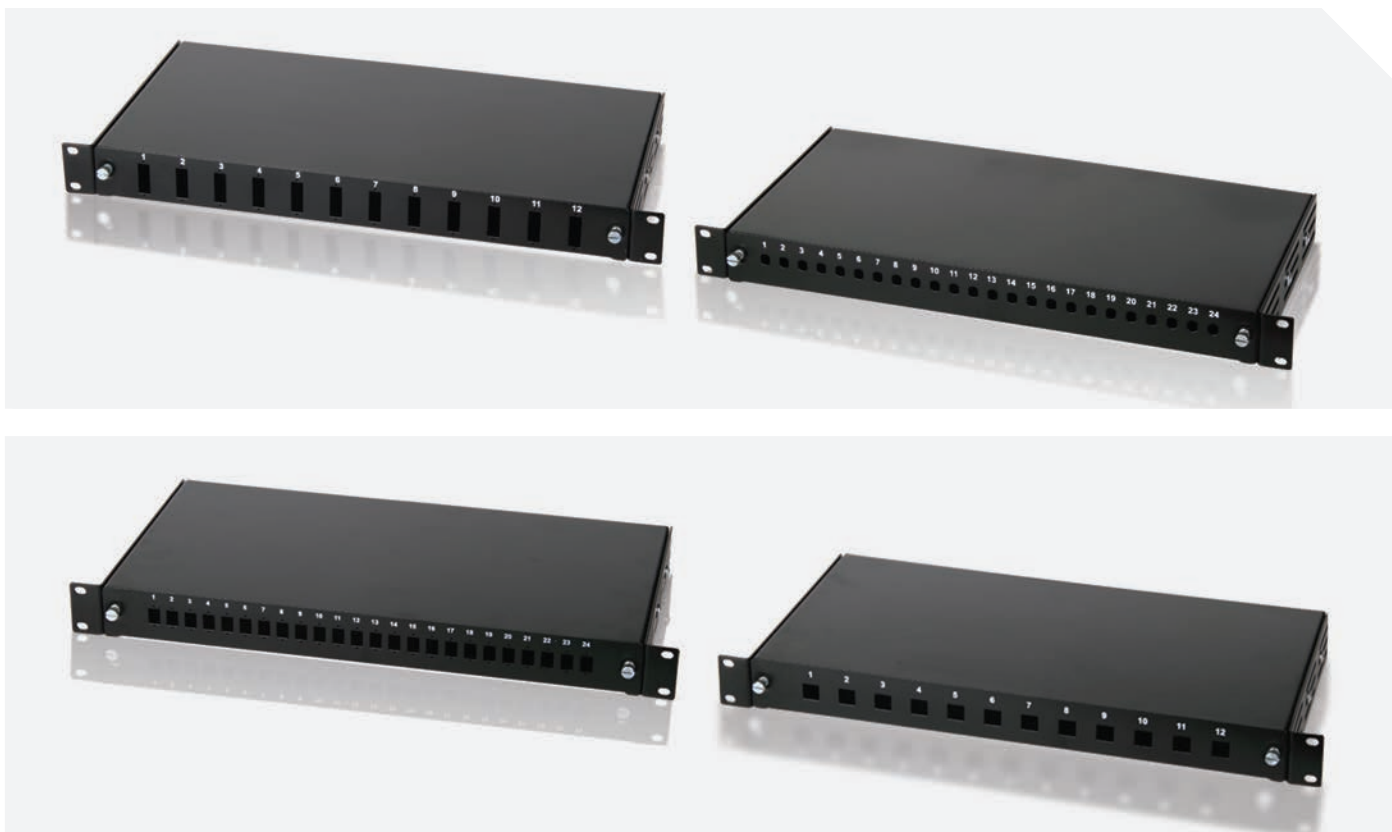

- 1 U, 19" rack mount
- Sliding type tray to access pigtails
- Sliding type rack mount bracket to adjust the depth
- Welded screw in the middle of inner surface for splice cassette.
- Standard colour is RAL 9005 black.  
RAL 7035 light grey colour is also available.
- Cable clamps on the inner surface for fixing cables
- Shipment configuration is 1 ea. PG16 plug and 4 ea. plastic cable organiser.

### Fiber optic termination boxes - 1U, 19" Rack mount optical distribution boxes

Part number	Product definition	W X D x H (mm)
<b>M66 PP 12SC D</b>	1U 19" Optical distribution box, capacity: 12 ea. SC duplex, adaptor fixing hole diameter= XX mm	482x225x44,45
<b>M66 PP 12SC S</b>	1U 19" Optical distribution box, capacity: 12 ea. SC simplex, adaptor fixing hole diameter= XX mm	482x225x44,45
<b>M66 PP 24SC D</b>	1U 19" Optical distribution box, capacity: 24 ea. SC duplex, adaptor fixing hole diameter= XX mm	482x225x44,45
<b>M66 PP 24SC S</b>	1U 19" Optical distribution box, capacity: 24 ea. SC simplex, adaptor fixing hole diameter= XX mm	482x225x44,45
<b>M66 PP 12 ST</b>	1U 19" Optical distribution box, capacity: 12 ea. ST / FC	482x225x44,45
<b>M66 PP 24 ST</b>	1U 19" Optical distribution box, capacity: 24 ea. ST / FC	482x225x44,45
<b>M66 PP 12 LC</b>	1U 19" Optical distribution box, capacity: 12 ea. LC duplex	482x225x44,45

XX=1,8 mm - 2,4 mm - 3 mm

Please mention the adaptor fixing hole diameter in your orders.

Unless mentioned, the product will send with 3 mm hole diameter as standard.